


Colour

Protocol


Network




Models

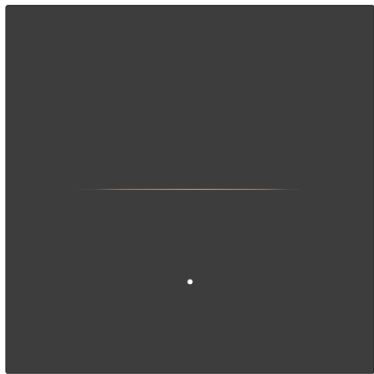

1 Gang


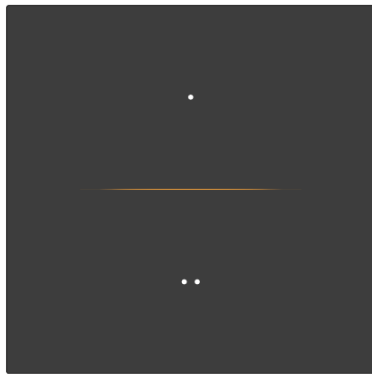


2 Gang

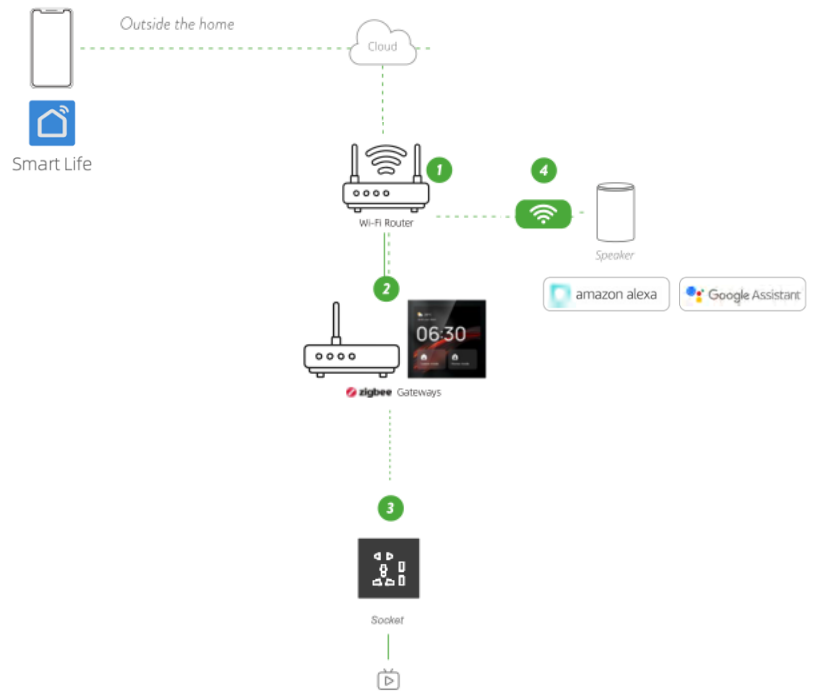


- Hotel Luxury Design and Material
- One Piece Glass surface
- Background Illumination works in dark environment
- iPhone grade Anti-Glaze Glass with 4 colours selection
- Scratch and fingerprint resistance

Colour

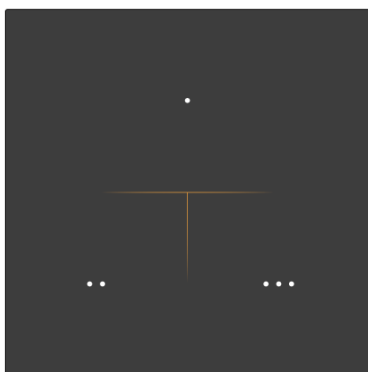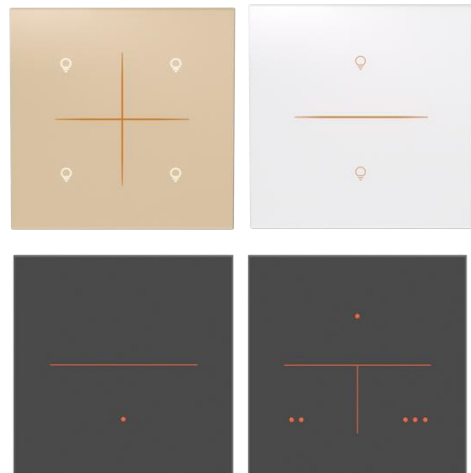


3 Gang

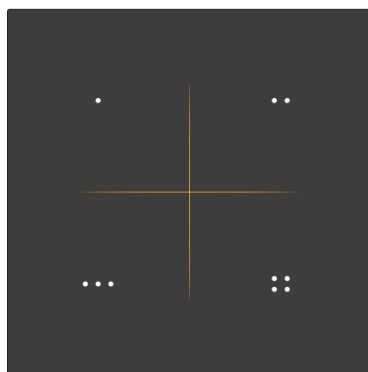

4 Gang




LAYOUT

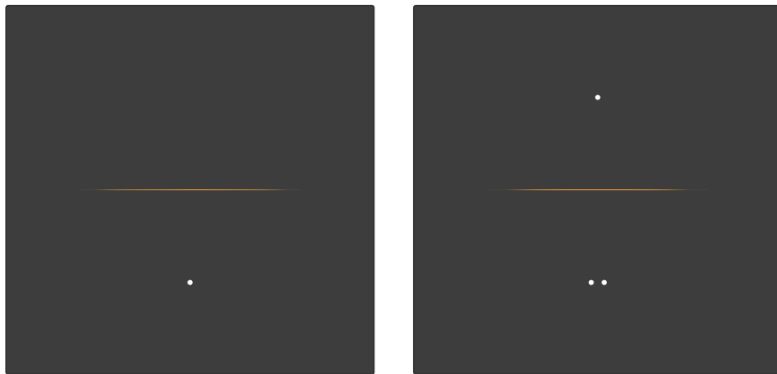

1 Gang

2 Gang

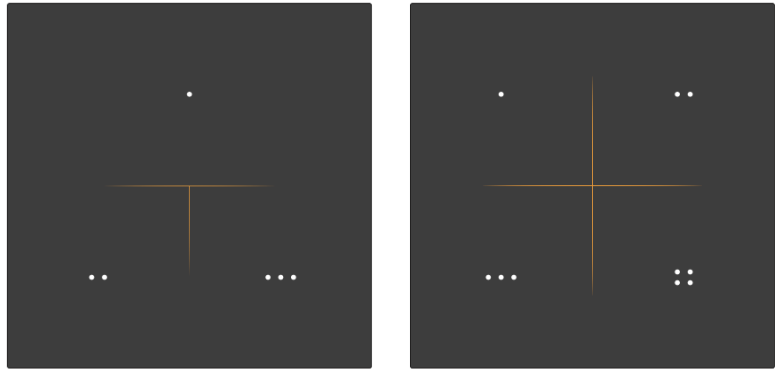

3 Gang

4 Gang

SPECIFICATION

Rated Voltage	AC 110-250V/50-60Hz
Power mode	Live Neutral line power supply
Rated power	LED 300W (Max)
Resistance load	600W (Max)
Neutral	With or Without, model based
Control Ways	1/2/3/4/Scenes
Standard	EU, UK type
Dimensions	86x86mm
Approved location	Dry locations
Work temperature	-15°C~+45°C

PRODUCT DIMENSION

