



Colour

Protocol


Network

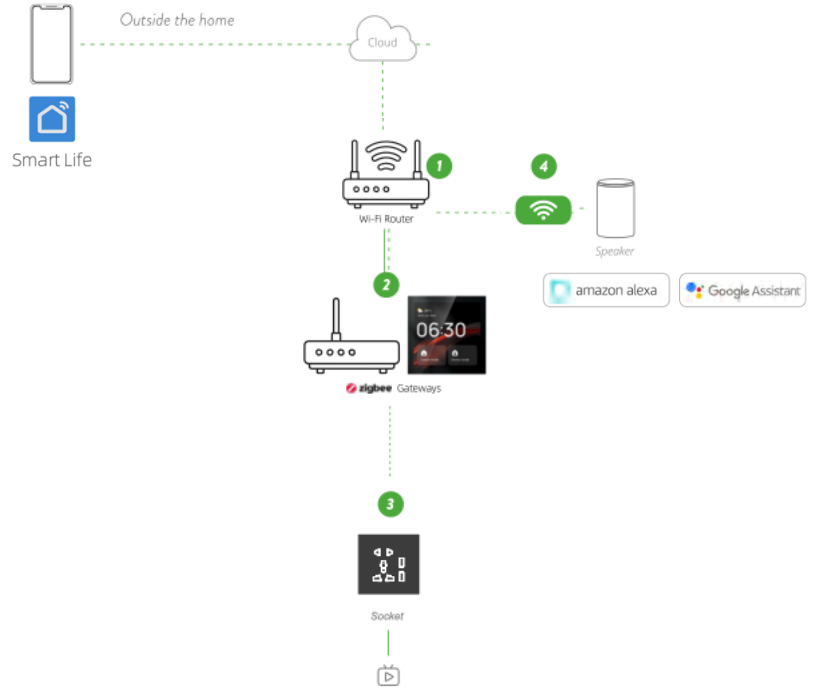


Models




1 Gang

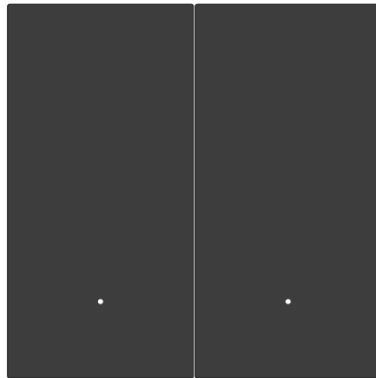


2 Gang

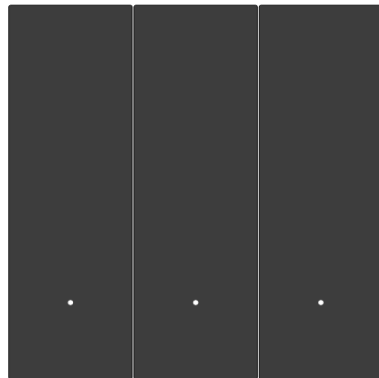

3 Gang

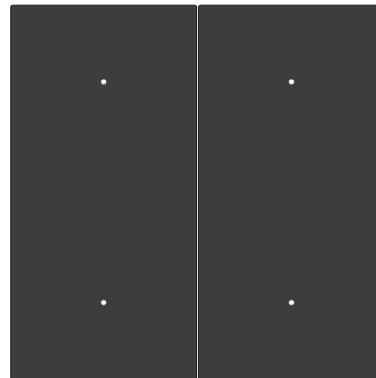

4 Gang

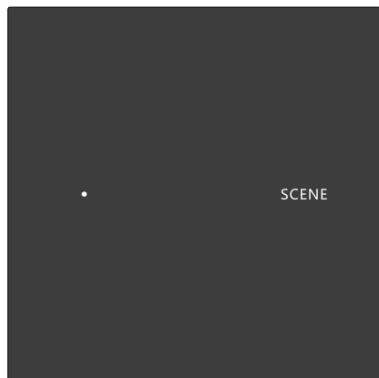

1 Gang + 1 Scene




2 Gang + 2 Scene

- Hotel Luxury Design and Material
- Separate Glass surface
- Background Illumination works in dark environment
- iPhone grade Anti-Glaze Glass with 4 colours selection
- Scratch and fingerprint resistance


Colour




LAYOUT




1 Gang




2 Gang



3 Gang



4 Gang



1 Gang + 1 Scene



2 Gang + 2 Scene

SPECIFICATION

Rated Voltage	AC 110-250V/50-60Hz
Power mode	Live Neutral line power supply
Rated power	LED 300W (Max)
Resistance load	600W (Max)
Neutral	With or Without, model based
Control Ways	1/2/3/4/Scenes
Standard	EU, UK type
Dimensions	86x86mm
Approved location	Dry locations
Work temperature	-15°C~+45°C



PRODUCT DIMENSION

